


FlexiShield

Paint Protection Film

www.FlexiShield.com

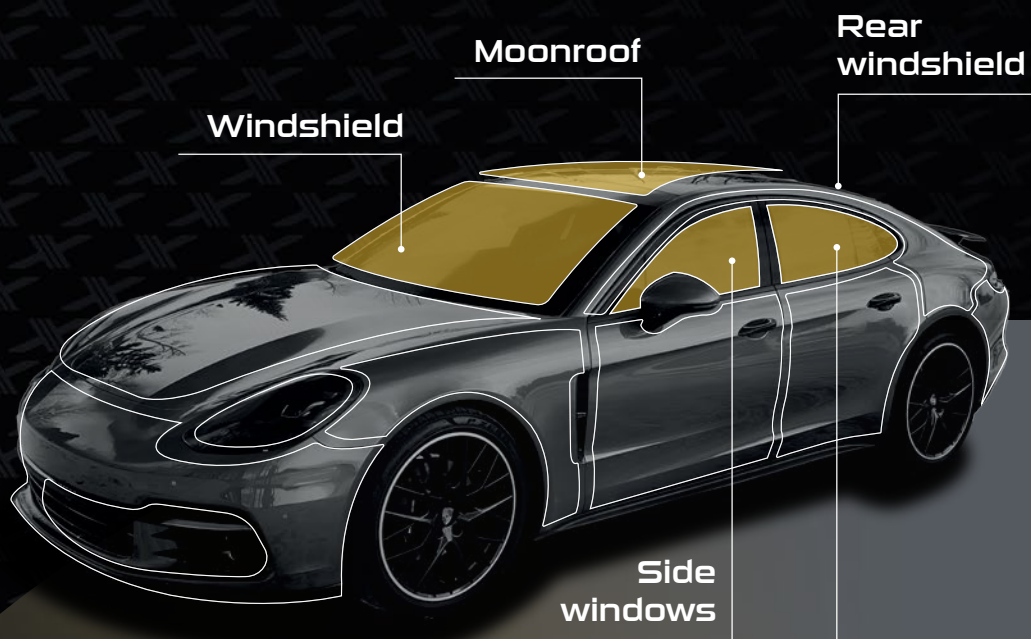

FlexiShield Solar Control Window Films

are designed to enhance comfort and energy efficiency across automotive, marine, and architectural applications.

For automotive use, the films reduce heat, glare, and UV exposure, improving interior comfort and protecting interior finishings against fading.

In marine applications, the films provide sun protection, reduce cabin heat and air conditioning-related fuel consumption, and protect passengers and interiors from UV damage.

For architectural use, FlexiShield films block solar heat, lower cooling costs, and minimize glare, creating a more comfortable indoor environment while significantly reducing the need for energy-consuming mechanical cooling.

FlexiShield offers a range of ceramic, metallic, dyed, and hybrid window film technologies to perfectly match every application and climate requirement.

A brand of:



Series

SHIELD

Multilayer nano ceramic coating

COVERAGE YOU CAN COUNT ON!

FlexiShield FS Series

Multilayer nano ceramic coating

Multilayer nano-ceramic coating window films offer superior heat rejection, UV protection, and glare reduction without sacrificing visibility. These films provide enhanced durability, scratch resistance, and long-term performance.



Dye- and metal-free composite film invulnerable to color fading or shade changes.



Exceptional IR protection (88% to 96%) and 99% UV protection.



Non-metallic construction for a zero-interference protection layer which does not affect cell-phone, radio, and GPS signals



Energy-efficient, blocking most of the solar heat from entering your vehicle. For a comfortable, safe, and energy-efficient driving experience.

Their advanced technology ensures effective thermal insulation, improved energy efficiency, and a sleek, non-reflective appearance, making them ideal for both automotive and architectural applications in which minimum alteration of the original glass look is a priority.

1,5mil 2ply (FS 70 = 3,0mil).
VLT's 10 to 70.
Life-time warranty.

FS specifications	FS-70	FS-50	FS-40	FS-30	FS-20	FS-10
Thickness	3.0mil	1.5mil	1.5mil	1.5mil	1.5mil	1.5mil
Visible Light Transmission	72%	52%	42%	31%	23%	12%
Visible Light Reflection Exterior / Interior	9%/ 9%	6%/ 6%	6%/ 6%	6%/ 6%	5%/ 5%	5%/ 5%
Infra-Red Rejection	96%	88%	90%	90%	90%	90%
UV Rejection	99%	99%	99%	99%	99%	99%
Glare Reduction	26%	40%	52%	63%	83%	93%
Total Solar Energy Rejection	56%	51%	54%	58%	65%	69%

FlexiShield USA HQ & Manufacturing

+1 (866) 312 9909

FlexiShield EU Distribution Office

+31 6 3458 3582

FlexiShield ME Distribution Office

+971 50 555 4246

www.FlexiShieldUSA.com
contact@reflekttech.com
280 N Roosevelt Ave
Chandler AZ 85226 USA

www.FlexiShieldEU.com
salesEU@reflekttech.com
Marconistraat 70H
Gouda 2809PE NL

www.FlexiShieldME.com
salesME@reflekttech.com
WH 36/D 06 ABA Avenue
Al Qouz 02, Dubai, UAE



100% US manufactured,
developed and tested under the
blazing Arizona sun.

FS Series