


FlexiShield

Paint Protection Film

www.FlexiShield.com

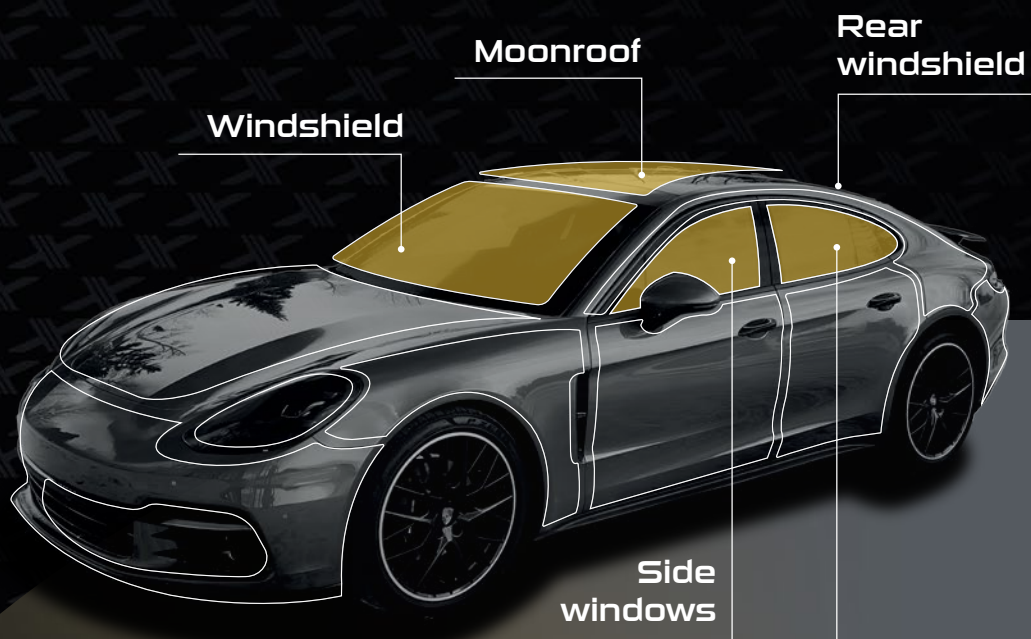

FlexiShield Solar Control Window Films

are designed to enhance comfort and energy efficiency across automotive, marine, and architectural applications.

For automotive use, the films reduce heat, glare, and UV exposure, improving interior comfort and protecting interior finishings against fading.

In marine applications, the films provide sun protection, reduce cabin heat and air conditioning-related fuel consumption, and protect passengers and interiors from UV damage.

For architectural use, FlexiShield films block solar heat, lower cooling costs, and minimize glare, creating a more comfortable indoor environment while significantly reducing the need for energy-consuming mechanical cooling.

FlexiShield offers a range of ceramic, metallic, dyed, and hybrid window film technologies to perfectly match every application and climate requirement.

A brand of:



REF Series

Non-fading Color Stable Dip Dyed

COVERAGE YOU CAN COUNT ON!

FlexiShield PR Series

Non-fading Color Stable Dip Dyed

The perfect balance between performance and affordability.

Non-fading Color Stable Dip Dyed window films provide long-lasting, vibrant color retention without fading over time.



Double-layered dip-dyed film for a longer service life and performance.



Total Solar Energy Rejection TSER (30% to 45%) and 99% UV protection.



Non-reflective appearance.



Non-metallic construction for a zero-interference protection layer which does not affect cell-phone, radio, and GPS signals



Energy-saving and cost-effective, for a comfortable and safe driving experience.

These films offer excellent heat and UV protection, reducing interior heat buildup and safeguarding against sun damage. With consistent aesthetic appeal and enhanced durability, they deliver both functionality and style for residential or commercial use.

PR specifications	PR-70	PR-50	PR-40	PR-35	PR-30	PR-20	PR-15	PR-07
Thickness	1.0mil	1.0mil	1.0mil	1.0mil	1.0mil	1.0mil	1.0mil	1.0mil
Visible Light Transmission	70%	50%	42%	37%	32%	23%	15%	7%
Visible Light Reflection Exterior / Interior	6% / 6%	6% / 6%	6% / 6%	6% / 6%	6% / 6%	6% / 6%	5% / 7%	5% / 7%
Infra-Red Rejection	35%	30%	31%	31%	32%	33%	32%	31%
UV Rejection	99%	99%	99%	99%	99%	99%	99%	99%
Glare Reduction	29%	33%	51%	56%	64%	71%	79%	82%
Total Solar Energy Rejection	32%	30%	34%	36%	38%	40%	42%	45%

FlexiShield USA HQ & Manufacturing

+1 (866) 312 9909

FlexiShield EU Distribution Office

+31 6 3458 3582

FlexiShield ME Distribution Office

+971 50 555 4246

www.FlexiShieldUSA.com
contact@reflekttech.com
280 N Roosevelt Ave
Chandler AZ 85226 USA

www.FlexiShieldEU.com
salesEU@reflekttech.com
Marconistraat 70H
Gouda 2809PE NL

www.FlexiShieldME.com
salesME@reflekttech.com
WH 36/D 06 ABA Avenue
Al Qouz 02, Dubai, UAE



100% US manufactured,
developed and tested under the
blazing Arizona sun.

1,0mil 1ply.
VLT's 07 to 70.
Life-time warranty.

PR Series